


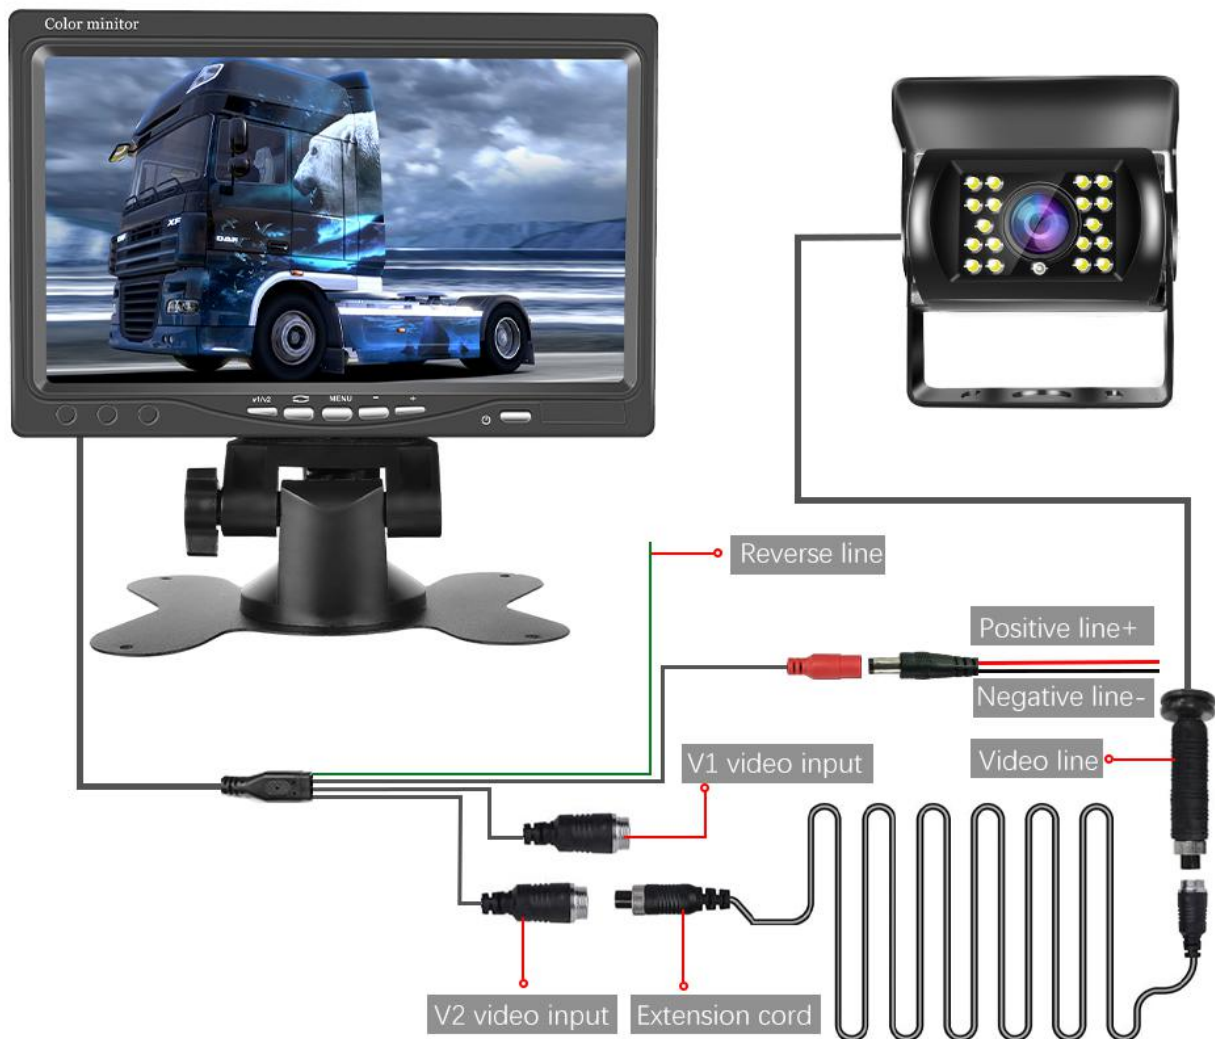

Check Package List

	Monitor*1
	Camera*1
	Power cord*1
	Remote control*1
	Video transmission extension line*1
	Bracket*1
	Base fixing sticker*1
	Camera fixing screws*1
	Instructions*1

Wires Diagram







We recommend doing a benchmark test before installation to insure that all components are working properly.

Before drilling please check that no cable or wiring is on the other side of the wall. Please clamp all wires securely to recycle the possibility of them being damaged while vehicle is in use. Keep all cables away from hot/moving parts and electrical noisy components.



Buttons Introduction



Button	Function
<p>V1/V2</p> 	Switch video input channel
	Image flipped
<p>MENU</p> 	Menu
<p>-</p> 	Option Key
<p>+</p> 	Option Key
<p>⏻</p> 	On/Off

Icon Introduction

Icon	Function
	Set brightness/contrast/saturation/tint
	Turn guide line on/off
	Set image mirror or positive
	Set language or others

Installation Method



Remove the monitor by pressing the side buttons at the same time



Install the back cover where you want to install it and fix it with screws (screw accessories are included in the set)



Install the display into the shell and you're done



Remove the monitor by pressing the side buttons at the same time



Take out the iron sheet and adjust the bracket to a suitable angle through the adjusting nut



Insert the iron sheet into the card slot on the back of the monitor



Align the bracket with the iron plate and lock it with the adjusting nut



The stand supports adjusting the angle. The bracket can be fixed with screws or stickers included in the set



Remove the monitor by pressing the side buttons at the same time



Take out the iron sheet and adjust the bracket to a suitable angle through the adjusting nut



Align the bottom of the monitor with the stand, and use the adjusting nut to lock the monitor and stand



The bracket supports left and right torsion and front and rear adjustment angles. The bracket can be fixed with screws or stickers included in the set

Specification

7-inch Color Monitor	
Viewing Options	Single picture
Grid lines	Can be switched on/off
Resolution	800*480 16:9
Viewing angle	Any angle
Contrast	350:1
System	PAL/NTSC
Screen size	154mm*87mm
Working current	400mA
Operation Temperature	-10° C~60° C
Storage temperature	-25° C~85° C
Video	Support up for 2 cameras

Camera	
Noise Ratio (SNR)	>69 dB
Audio	Does not support
Infrared Function	Automatic gain control, automatic white balance, automatic backlight compensation
Pixel	1280*720P
TV System	PAL/NTSC
Waterproof Rating	IP69
Minimum illumination	0.01Lux
Operating Temperature	-30° C ~+80° C
Working humidity	RH20%~80%Max

Tec Support: hikitySupports@163.com

<https://thehikity.com>

